

www.vcom.com.hk


VCOM INTERNATIONAL LTD.

Head Quarter

>1/2F, Building D, Youke Business Center, Kexin Rd, Tangxia, Tianhe District,
Guangzhou City, Guangdong Province, China
Tel:+86-20-88525625 Fax:+86-20-88525625 Email:vcom@vcom.hk

Cable & Electronic Factory

>Xiaopenggang Industrial Zone, Longxi Town, Beiuo District, Huizhou City,
Guangdong Province, China
Tel:+86-752-6873123 Fax:+86-752-6873155

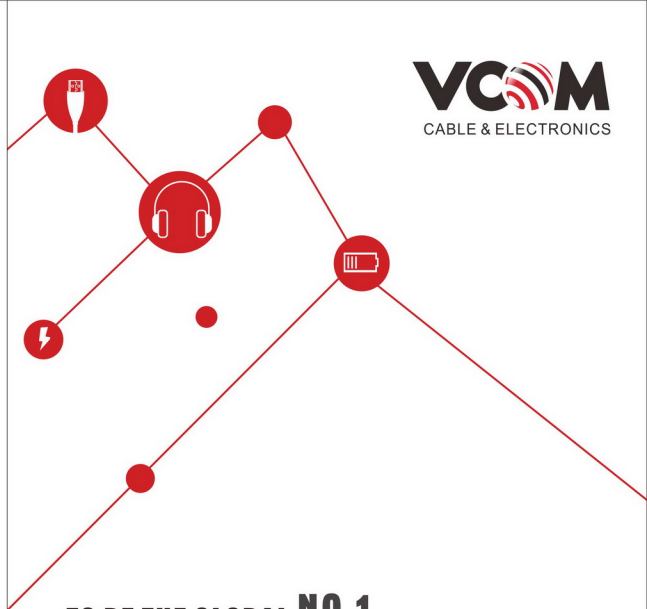

TO BE THE GLOBAL NO.1 BRAND ON COMPUTER PERIPHERALS

www.vcom.com.hk

COMPANY PROFILE

VCOM INTERNATIONAL LTD is one of the subsidiaries of VCOM Group. It was founded in 2004, located in Guangzhou China. It is professional in intelligent building cabling system. We are a collectivization enterprise with R&D, sales and service. We have three production bases, which are located in Dongguan, Huizhou and Fuzhou Jiangxi.

We have independent intellectual property rights of VCOM brand. After years of continuous development and innovation, VCOM has become integrated cable industry recognized as the most valuable international brand. VCOM has a high reputation in domestic and abroad. We have branches agents in major cities in China, and have agents in more than 98 countries in the world.

Relying on powerful R&D team and production technology, we have developed Cat5e UTP, FTP, SFTP and Cat6 systems, Cat7 cabling system, coaxial CCTV system, telephone voice system, audio and video teaching system and so on. The SFTP Cat5e cable structure has obtained China national practical patent. VCOM has passed the international ISO9001 (2000) quality system certificate, our products passed the UL, CE, VDE certificates and China 3C certification.

VCOM takes the concept of win-win cooperation, continues to expand and deepen the business channels. We set up branches or agents not only in China but in all over the world. We established a perfect sales and after-sales service system, to promote VCOM brandy powerful. With stable quality and good reputation, excellent market achievements for successive years, VCOM have all kinds of industry users and supports. VCOM cabling system products have been widely used in the financial, medical, university, airports, sea ports and train stations and other various of industries project.

VCOM International LTD, will do more detailed market analysis and surveys to develop more user-friendly products and solutions. We are continuously to make contribution to the development of industry by our own strengths



CONTENTS

1. Audio

1.1 Children Headphone.....	03
1.2 Headphone.....	07
1.3 Bluetooth Headphone.....	09
1.4 Bluetooth Speaker.....	11

2. Computer Accessory

2.1 Mouse.....	13
2.2 Vertical Mouse.....	15
2.3 Keyboard.....	17
2.4 Mouse & Keyboard Combo.....	17
2.5 USB HUB.....	19
2.6 Webcam.....	20

3. Chargers

3.1 Wall Charger.....	21
3.2 USB Desktop Charger.....	22
3.3 Car Charger.....	22

4. AV Adaptor

4.1 HDMI Splitter.....	23
4.2 HDMI Switch.....	24
4.3 KVM Switch.....	25
4.4 VGA Splitter.....	26
4.5 Extender.....	26



PC PERIPHERAL ELECTRONICS



Beyond your imagination

PRINCESS Series



DE801



HERO Series



DE803



MONSTER Series



DE802



MONSTER Series



DE805



CHILDREN SERIES

Children Headphone



DE801-R1
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE801-L1
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE801-P
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE802-N
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE802-P
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE802-Y
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE802-RB
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE803-YB
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE803-L1
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE803-RL2
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE803-WL1
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE805-PW
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE805-RW
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE805-NY
Children Headphone
 Driver Unit: 30mm
 Impedance: 32Ω
 Sensitivity: 92±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 30mW
 Length of Cord: 1.5m
 Plug Type: 3.5mm stereo plug with or without mic optional



DE824
Children Headphone
 Driver Unit: 40mm
 Impedance: 32Ω
 Sensitivity: 88±3dB (at 1mW/1kHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 50mW
 Length of Cord: 1.1m



DE817
Sleep Headphones
 Material: Pvc Foam
 Driver Unit: 20mm
 Impedance: 32Ω
 Sensitivity: 80±3dB (at 1mW/1kHz)
 Frequency Range: 20Hz-20KHz
 Cord Length: 1.85M



DE818
Sleep Headphones
 Material: Pvc Foam
 Driver Unit: 20mm
 Impedance: 32Ω
 Sensitivity: 80±3dB (at 1mW/1kHz)
 Frequency Range: 20Hz-20KHz
 Cord Length: 1.85M



Headphone

PC Headphone ▶▶▶

DE160

Driver Unit: 40mm
 Impedance: 32Ω
 Sensitivity: 106±3dB (at 1mW/1KHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 100mW
 Length of Cord: 2.1m
 Plug Type: 3.5mm



DE143U

Driver Unit: 40mm
 Impedance: 32Ω
 Sensitivity: 110±3dB (at 1mW/1KHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 100mW
 Length of Cord: 2m
 Plug Type: USB port



Mobile Headphone ▶▶▶

DE160M

Driver Unit: 40mm
 Impedance: 32Ω
 Sensitivity: 106±3dB (at 1mW/1KHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 100mW
 Length of Cord: 1.8m
 Plug Type: 3.5mm



DE163

Speaker Spec:
 Driver Unit: 40mm
 Impedance: 32Ω
 Sensitivity: 106±3dB (at 1mW/1KHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 100mW
 Microphone Spec:
 Microphone Unit: Ø6*5mm
 Impedance: 2.2kΩ
 Sensitivity: 58±3dB
 Frequency Response: 30Hz-16KHz
 Directivity: Omnidirectional
 Length of Cord: 1.5m with handle microphone without control
 Plug Type: 3.5mm



USB Headphone ▶▶▶

DE163U

Speaker Spec:
 Driver Unit: 40mm
 Impedance: 32Ω
 Sensitivity: 106±3dB (at 1mW/1KHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 100mW
 Microphone Spec:
 Microphone Unit: Ø6*5mm
 Impedance: 2.2kΩ
 Sensitivity: 58±3dB
 Frequency Response: 30Hz-16KHz
 Directivity: Omnidirectional
 Length of Cord: 1.8m With handle microphone and control
 Plug Type: USB



DE160U

Driver Unit: 40mm
 Impedance: 32Ω
 Sensitivity: 106±3dB (at 1mW/1KHz)
 Frequency Response: 20Hz-20KHz
 Max Input Power: 100mW
 Length of Cord: 1.8m
 Plug Type: USB port



Wireless Headphone ▶▶

M291

Bluetooth version: V5.0
Profile: A2DP/AVRCP/HSP/HFP
Battery: 180mAh
Driver Unit: Ø40mm
(changed unit better one/final sample)
Impedance: 32Ω
Sensitivity(SPL): 110±3dB
Frequency response: 20Hz-20 KHz
LOGO single color silk print(no fading)
Hologram sticker attach on color box.



M283

Chipset: J.L
Bluetooth version: V5.0+EDR
Transmission distance: 10 m
Playing time: 7-8 hours
standby time: 300 hours
battery: 400 mAh rechargeable lithium battery
Charging time: 1-2 hours
Speaker: Ø40 mm
Sensitivity: 110 ± 3dB S.P.L at 1KHz
Impedance: 32 Ω
Frequency response: 20Hz-20khz
Rated power: 15mW * 2
Music playback time: 7-8 h



M279

Bluetooth, FM, TF Card play
and Aux-in function Foldable

Bluetooth Version: 5.0
Battery Specs: 3.7V, 300mAh
Charging time: 2 hours
Using time: 10 hours



M281

Chip: J.L
Bluetooth version: V5.0+EDR
Transmission distance: 10 meters
Standby time: 300 hours
Battery: 200 mAh rechargeable lithium battery
Charging time: 1.5 hours
Speaker: Ø40mm
Sensitivity: 110±3dB S.P.L at 1KHz
Impedance: 32Ω
Frequency response: 20Hz-20 KHz
Rated power: 5W*2
Music playing time: 4h

Bluetooth Headphone

M278

Chip: J.L
Bluetooth version: V5.0+EDR
Transmission distance: 10 meters
Standby time: 300 hours
Battery: 200 mAh rechargeable lithium battery
Charging time: 1.5 hours
Speaker: Ø40mm
Sensitivity: 110±3dB S.P.L at 1KHz
Impedance: 32Ω
Frequency response: 20Hz-20 KHz
Rated power: 5W*2
Music playing time: 4h



M280

Bluetooth version: V5.0+EDR
Transmission distance: 10 m
Playing time: 4 hours
Standby time: 300 hours
Battery: 200 mAh rechargeable lithium battery
Charging time: 1.5 hours



M293

Bluetooth version: V5.0+EDR
Transmission distance: 10 m
Standby time: 300 hours
Battery: 200 mAh rechargeable lithium battery
Charging time: 1.5 hours



M277

Bluetooth version: V5.0+EDR
Transmission distance: 10 m
Battery: 300 mAh rechargeable lithium battery
Charging time: 2 hours
Music playing time: 10 hours



M950

Bluetooth version: V5.0+EDR
Battery: 200 mAh rechargeable lithium battery
Charging time: 1 hours
Music playback time: 3-4hours



Active Noise Cancellation Bluetooth Headphone



M292/ANC

Chipset: JL
Bluetooth version: V5.0+EDR
Battery: 250 mAh rechargeable lithium battery
Playing time (Noise reduction + Bluetooth): 3hours



M293/ANC

Chipset: JL
Bluetooth version: V5.0+EDR
Battery: 250 mAh rechargeable lithium battery
Playing time (Noise reduction + Bluetooth): 3hours

New Arrival ANC Headphone



Built for Comfort



Active Noise Cancelling

Professional Active Noise Cancelling Technology.
Significant noise reduction for travel, work and anywhere in between.

ACTIVE NOISE CANCELLING /

ANC

Hi-Fi



650mAh
Rechargeable Battery



Independent
ANC Switch



Hands-free
Calling



Playing Time



M290/ANC

Chipset: CSR8635
Wireless version: V4.1
Battery capacity: 600 mAh rechargeable lithium battery
Playing time: 18 hours



M283ANC

Chipset: JL+ADI
Speaker: Φ 40mm Dynamic type
Wireless distance range: 10M
Bluetooth version: 5.0
Main Features: Active Noise Cancelling
Battery capacity: 3.7V/380 mAh (seiko protection board)
Noise canceling on only: 7-8 hours

MOUSE

Wired Mouse



DM112

Wired mouse
Material: ABS
Resolution: 1000 DPI
Key Number: 3
Key life: 3000000 times
Interface: USB
Cable Length: 1.35m
Size: 110*60*37mm
Weight: 55.3g
System Requirement: Windows2000/
XP/Vista/7/8/10& MAC OS X

DM106

Wired Mouse
Material: ABS
Resolution: 800/1000/1200DPI
Key Number: 3
Key life: 1000000 times
Interface: USB
Cable Length: 1.20m



DM114

Wired Mouse
Material: ABS
Resolution: 1200 DPI
Key Number: 3
Key life: 3000000 times
System Requirement: Windows2000/
Vista/7/8/10& MAC OS X

DM115

Wired Mouse
Material: ABS
Resolution: 1000 DPI
Key Number: 3
Key life: 2000000 times
System Requirement: Windows98/2000/
/8/10/XP/Vista/Mac



Wireless Mouse

DM504

Bluetooth Mouse
Working Frequency: 2.4GHz
Working Distance: 10m
Resolution: 400/800/1200 DPI
Key Number: 6
Key life: 3000000 times
Battery Requirements: 2AAA batteries
System Requirement: Windows2000/XP
/Vista/7/8/10& MAC OS



DM500

Wireless Mouse
Material: ABS
Resolution: 1000/1200/1600DPI
Key number: 6
Working Frequency: 2.4GHz
Working Distance: 10m
Key life: 3000000 times
Battery Requirements: 2*AAA batteries
System requirements: Windows98 /
2000 / 7 / 8 / 10 / XP / Vista / Mac
Gray, Black, Red, Blue



DM508

Working Frequency: 2.4GHz
Working Distance: 10M
Resolution: 800/1200/1600 DPI
Key Number: 4
Key life: 3000000 times
Battery: AA*1
System Requirement: Windows98
/2000/7/8/10/XP/Vista/Mac
black&blue



DM509

Working Frequency: 2.4GHz
Working Distance: 10M
Resolution: 1200 DPI
Key Number: 3
Key life: 3000000 times
Battery: AAA*2 (not included)
System Requirement: Windows98/2000
/7/8/10/XP/Vista/Mac



DM520C

Bluetooth Two-Port Mouse
Resolution: 800/1200/1600 DPI
Key Number: 6
Key life: 3000000 times
Interface: USB/Type-c receiver
Working Distance: 3M
System Requirement:
Windows98/2000/7/8/10/XP/Vista/Mac
Battery: AA*1 (not included)



DM506

Wireless mouse
Material: ABS
Working Frequency: 2.4GHz
Working Distance: 10m
Resolution: 400/800/1200 DPI
Key Number: 6
Key life: 3000000 times
Battery Requirements: 2AAA batteries
System Requirement: Windows2000/XP/Vista/7/8/10& MAC OS
black



Wired GAME MOUSE

DM420

Material: ABS
Resolution: 800/1200/1600/2000/2400 DPI
Key Number: 6
Key life: 3000000 times
Interface: USB or PS/2 Optional
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac



DM421

Material: ABS
Resolution: 800/1200/1600/2000/2400 DPI
Key Number: 6
Key life: 3000000 times
Interface: USB or PS/2 Optional
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac



DM418

Game Mouse
3D design with DPI button and forward/backward button
Connection: Wired USB2.0 interface
Resolution: 800/1200/1600/2000/2400 DPI
Working environment: 5V, 100mA
Key life: 3000000 times
Suitable for: Windows2000/XP/Vista/7/8/10 & MAC OS



DM419

Game Mouse
3D design with DPI button and forward/backward button
Connection: Wired USB2.0 interface
Resolution: 800/1200/1600/2000/2400 DPI
Working environment: 5V, 100mA
contoured sides
Key life: 3000000 times
Suitable for: Windows2000/XP/Vista/7/8/10 & MAC OS



Wireless GAME MOUSE

DM601

Material: ABS
Working Frequency: 2.4GHz
Working Distance: 10M
Resolution: 800/1200/1600/2000/2400 DPI
Key Number: 6
Key life: 3000000 times
Battery AAA*2 (not included)
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac



DM602

Material: ABS
Working Frequency: 2.4GHz
Working Distance: 10M
Resolution: 800/1200/1600/2000/2400 DPI
Key Number: 6
Key life: 3000000 times
Battery AAA*2 (not included)
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac



DM510

Material: ABS
Working Frequency: 2.4GHz
Working Distance: 10M
Resolution: 800/1200/1600/2000/2400 DPI
Key Number: 6
Key life: 3000000 times
Battery AAA*2 (not included)
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac
Orange&Black



DM511

Material: ABS
Working Frequency: 2.4GHz
Working Distance: 10M
Resolution: 800/1200/1600/2000/2400 DPI
Key Number: 7
Key life: 3000000 times
Battery AAA*2 (not included)
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac



DM513

Material: ABS
Working Frequency: 2.4GHz
Working distance: 10M
Resolution: 800/1200/1600/2000/2400 DPI
Key number: 6
Key life: 3000000 times
Battery AAA*2 (not included)
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac
Black



DM516

Material: ABS
Working Frequency: 2.4GHz
Working distance: 10M
Resolution: 800/1200/1600/2000/2400 DPI
Key number: 7
Key life: 3000000 times
Battery AAA*2 (not included)
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac
Black



Vertical Mouse

DM430

- Vertical Mouse
1. 2.4G+BT+RGB, dual-mode
 2. The charging interface is Type C, the 2.4G Bluetooth receiver is a USB-A interface, and the mouse must be equipped with an A2C charging cable;
 3. RGB colored lights
 4. DPI: 1000/1600 (default)/2400DPI
 5. Battery capacity: 1000mah
 6. System requirements: Windows 98/Me/2000/XP/Vista / Win7 /Win8 /Win10 or the latest version.



VERTICAL MOUSE

DM430



Ergonomic Design



Smart Hibernation

Born for health!



System requirements :

Windows 98/Me/2000/XP/Vista/ Win7 /Win8/ Win10 or the latest version.

Dual-Mode
2.4G+BT

Type C Interface

DPI:
1000/1600/2400

RGB
Colored Lights

Battery Capacity:
1000mAh



Keyboard

Waterproof Keyboard | Standard Keyboard | Multimedia Keyboard | Ultra Slim Multimedia Keyboard

DK100

Wired Keyboard

Material: ABS
Keys: 104 keys
Interface: USB
Cable: 2.5m * 1.2 m (outer length)
System Requirement: Windows2000/XP/Vista/7/8/10 & MAC OS X



DK123

Wired Keyboard

Material: ABS
Key layout: 104 keys
Keys stroke life: 50 million times
System Requirement: Windows98/2000/7/8/10/XP/Vista/Mac



Mouse & Keyboard Combo

DK204

2.4G Wireless Waterproof Keyboard & Mouse

Mouse:
Working Frequency: 2.4GHz
Working Distance: 5m
Resolution: 800/1200/1600 DPI
Key Number: 3
Key life: 2000000 times
Battery Requirements: AA*1 batteries


Keyboard:
Working Frequency: 2.4GHz
key layout: 104 keys
Key life: 5,000,000 times
Working Distance: 5m
Requirement: Windows2000/XP/Vista/7/8/10& MAC OS X & Android
Battery Requirements: AA*1 batteries



Chocolate **KEYBOARD**

DK204

- 2.4G Keyboard & Mouse
- Chocolate-design, Comfort touching
- Double Waterproof
- Non-Skid Stand
- HD UV Silkscreen Characters



USB HUB



DH302

USB 3.0 HUB
 Maximum transfer rates: 5Gbps
 Interface: Input: USB3.0 A type male X1
 Output: USB3.0 A type female X4
 Electronic switch NO
 Hot-swap: Support



DH307

Material: Plastic shell+Nickel plated plug
 Data transfer: USB 3.0 5Gbps
 Side 1: USB 3.0-A/ USB 3.0-C Male
 Side 2: USB 3.0*4-micro USB power sup
 Cable length:30cm



CU4383A

USB Type A TO USB3.0*4 HUB
 Aluminum Shell, 4 ports
 Maximum transfer rates: 5Gbps
 Interface: Input: USB3.0 A type male X1
 Output: USB3.0 A type female X4
 Electronic switch: NO
 Hot-swap: Support



DH207

USB 2.0 HUB
 Material: Plastic shell+Nickel plated plug
 Data transfer: USB 2.0 480Mbps
 Side 1: USB 2.0 A Male
 Side 2: USB 2.0*4-micro USB power sup
 Cable length:20cm



Bluetooth Transmitter & Receiver

DU116

Bluetooth Receiver
 Bluetooth Version: 5.0 +EDR
 Output Power Category: Class 2
 Support Bluetooth Profile: HFP HSP A2DP AVRCP
 Music Format: AAC SBC
 Receive Connection: 2
 Bluetooth Range: 10 Meter
 Bluetooth Frequency: 2.402-2.480GHz
 Battery capacity: 60mAh
 Charging time: 1.5 hours
 Working time: 4.5 hours



DU117

Bluetooth Transmitter
 Bluetooth Version: 5.0
 Output Power Category: Class 2
 Support Bluetooth Profile: A2DP HFP
 Music Format: Aptx-S Aptx Fast, stream SBC
 Bluetooth Range: 10 Meter
 Bluetooth Frequency: 2.402-2.480GHz
 Working Voltage: DC 5V



DU118

Bluetooth Transmitter & Receiver 2 in 1
 Bluetooth Version: 5.0 +EDR
 Output Power Category: Class 2
 Support Bluetooth Profile: HFP HSP A2DP AVRCP
 Music Format: Aptx-HD Aptx-LL Aptx AAC SBC
 Bluetooth Range: 10 Meter
 Bluetooth Frequency: 2.402-2.480GHz
 Battery capacity: 480mAh
 Charging time: 2 hours
 Working time: 20 hours



DU119

Bluetooth Transmitter & Receiver 2 in 1
 Bluetooth Version: 5.0
 Output Power Category: Class 2
 Support Bluetooth Profile: HFP HSP A2DP AVRCP
 Music Format: AAC SBC
 Bluetooth Range: 10 Meter
 Bluetooth Frequency: 2.402-2.480GHz
 Working Voltage: DC 5V
 Transmitter mode: red LED
 Receiver mode: blue LED



DU120

Bluetooth Transmitter & Receiver 2 in 1
 Bluetooth Version: 5.0
 Output Power Category: Class 2
 Support Bluetooth Profile: HFP HSP A2DP AVRCP
 Music Format: AAC SBC
 Bluetooth Range: 10 Meter
 Bluetooth Frequency: 2.402-2.480GHz
 Battery capacity: 200mAh
 Charging time: 2 hours
 Working time: 10 hours



Webcam

USB Camera 720P



IM0225B

Resolution: 1280*720p
 Master chip: Generalplus
 High definition: 1.3 million pixels
 Built-in microphone
 Camera Angle: 90 degrees
 Interface type: USB 2.0



IM0229A

Resolution: 1280*720p
 Master chip: Sonix
 High definition: 1.3 million pixels
 Interface type: USB 2.0



IM0227A

Resolution: 1280*720p
 Master chip: Realtek
 Lens: 130W pixels
 Angle: 90 degree, external MIC, free drive
 USB2.0 + 3.5 mm headphone jack

USB Camera 1080P



IM0225

Resolution: 1920*1080p
 Master chip: Sonix
 Video frame rate: 30FPS
 Driver type: no driver (plug and play)
 Interface type: USB 2.0
 High definition: 2 million pixels



IM0229

Resolution: 1920*1080p
 Master chip: Sonix
 Driver type: no driver (plug and play)
 Interface type: USB 2.0
 Horizontal Angle: 60-130°



IM0226

Resolution: 1920*1080p
 Master chip: Sonix
 Driver type: no driver (plug and play)
 Interface type: USB 2.0
 Wide angle: D=74°



IM0185A

Resolution: 1920*1080p
 Master chip: Sonix + 6 layer glass lenses
 Hardware pixels: 1066P 2 million pixels
 Focus mode: Manual focus
 Lens wide Angle: 65°



IM0232

Resolution: 1920*1080p
 Master chip: Sonix
 Hardware pixels: 1066P 2 million pixels
 Focus mode: Manual focus
 Lens wide Angle: 76°



IM0233

Resolution: 1920*1080p
 Master chip: Sonix
 Hardware pixels: 1066P 2 million pixels
 Focus mode: Manual focus
 Lens wide Angle: 65°

Chargers

GaN Charger

M005

65W 1C GaN PD Charger

Input: AC 100-240V 50/60HZ, 1A Max
 Output: USB-C (PPS: 3.3-21V/3.2A);
 5V/3A 9V/3A 12V/3A 15V/3A 20V
 /3.25A (65W Max)
 Plug: EU, US, UK
 Certification: CE, FCC, ROHS
 White/Black



M006

65W 2C GaN PD charger

Input: AC 100-240V 50/60HZ, 1A Max
 Output: USB-C1 (PPS: 3.3-21V/3.2A);
 5V/3A 9V/3A 12V/3A 15V/3A 20V
 /3.25A (65W Max)
 Output: USB-C2: 5V/3A 9V/2A 12V
 /1.5A (18W Max)
 Output: USB-C1+USB-C2: 45W+18W
 Plug: EU, US, UK
 Certification: CE, FCC, ROHS
 White/Black



M007

65W 2A+1C GaN PD Charger

Input: AC 100-240V 50/60HZ, 1A Max
 Output: USB-C (PPS: 3.3-21V/3.2A);
 5V/3A 9V/3A 12V/3A 15V/3A 20V
 /3.25A (65W Max)
 Output: USB-A1+USB-A2: 5V/3A (15W Max)
 Output: USB-C+USB-A: 45W+15W
 Plug: EU, US, UK
 Certification: CE, FCC, ROHS
 White/Black



M008

65W 1A+1C GaN PD charger

Input: AC 100-240V 50/60HZ, 1A Max
 Output: USB-C (PPS: 3.3-21V/3.2A);
 5V/3A 9V/3A 12V/3A 15V/3A 20V
 /3.25A (65W Max)
 USB-A: QC3.0 5V/3A 9V/2A 12V/1.5A (18W Max)
 Output: USB-C+USB-A: 45W+18W
 Plug: EU, US, UK
 Certification: CE, FCC, ROHS
 White/Black



M170

18W USB-C PD Charger/Power Bank 2in1

AC input: AC 100-240V
 Battery Input: DC5V, 2.5A max
 USB C input: DC5V, 10W
 USB C output: DC5V, 3.0A/9V,
 2.0A/12V, 1.5A (18W)
 USB-A output(QC3.0) DC5V,
 3.0A/9V, 2.0A/12V, 1.5A (18W)
 Type-C + USB A Output: DC 5V, 3.0A
 (in total)
 Battery cell: Lithium-ion / 26650
 Battery capacity: 5000mAh
 Battery capacity indication: 4 Led Indicators
 Certification: CE, FCC, ROHS
 White/Black



M002

33W 1A+1C GaN charger

Input: 100-240V AC 50/60Hz 0.8A Max
 USB-C Output: 5.0V=3A 9.0V=3A
 12.0V=2.5A 15.0V=2A 20V=1.5A
 (33W Max)PPS: 3.3V-11V=3A
 USB-A Output: 4.5V=5.0A 5.0V=4.5A
 9.0V=3A 12.0V=2.5A (33W Max)
 USB-C+A Output: 15W Max
 when using 1 port is 33w,
 When using A+C together is 15W total
 Plug: EU, US
 White/Black



M001

33W 1C GaN Charger

Input: 100-240V AC 50/60Hz 0.8A Max
 USB-C Output: 5.0V=3A 9.0V=3A
 12.0V=2.5A 15.0V=2A 20V=1.5A
 (33W Max)PPS: 3.3V-11V=3A
 Plug: EU, US
 White/Black

M002

33W 1A+1C GaN charger

Input: 100-240V AC 50/60Hz 0.8A Max
 USB-C Output: 5.0V=3A 9.0V=3A
 12.0V=2.5A 15.0V=2A 20V=1.5A
 (33W Max)PPS: 3.3V-11V=3A
 USB-A Output: 4.5V=5.0A 5.0V=4.5A
 9.0V=3A 12.0V=2.5A (33W Max)
 USB-C+A Output: 15W Max
 when using 1 port is 33w,
 When using A+C together is 15W total
 Plug: EU, US White/Black



M003

65W 1A+2C GaN charger

Input: AC 100-240V 50/60HZ, 1A Max
 Output: USB-C 1/2
 (PPS: 3.3-11V/5A); 5V/3A 9V/3A 12V
 /3A 15V/3A 20V/3.25A (65W Max)
 Output: USB-A(QC3.0): 4.5V/5A 5V
 /4.5A 5V/3A 9V/3A 12V/3A 20V/3A (60W Max)
 Output: USB-C 1 + USB-A: 45W+18W Max
 Output: USB-C 2 + USB-C 1: 10W+10W Max
 Output: USB-C 1 + USB-C 2 + USB-A: 45W+10W+10W 65W Max
 Plug: EU, US, UK
 White/Black

PD 65W Fast Charger

For Huawei fast charge
 62% in 30 minutes

USB output supports to Huawei SCP/FCP fast charging protocol, 5A high current fast charging



Chargers

Car Charger

M085

USB-C Car Charger 2 port 18W

Aluminum shell
 Input: DC 12-24V
 Output(USB-C): DC 5V3A, 9V2A, 12V1.5A
 Output(USB-A): DC 5V3A, 9V2A, 12V1.5A
 Port: USB-C+USB-A
 Power: 18W
 Charging protocol: PD3.0, Apple 2.4A, QC3.0, Huawei FCP
 Gun Gray



Wall Charger

M035-US

USB Charger 2port 12W US Type
 Input: AC 100V-240V
 Output: DC 5V 2.4A
 Port: USB-A*2
 Power: 12W
 White



M035-EU

USB Charger 2port 12W EU Type
 Input: AC 100V-240V
 Output: DC 5V 2.4A
 Port: USB-A*2
 Power: 12W
 White



M035-UK

USB Charger 2port 12W UK Type
 Input: AC 100V-240V
 Output: DC 5V 2.4A
 Port: USB-A*2
 Power: 12W
 White



M051-US

USB-C PD Charger 20W US Type
 Input: AC 100V-240V
 Output: DC 5V3A, 9V2.22, 12V1.65A
 Port: USB-C
 Power: PD3.0 20W
 Charging protocol: PD3.0, Apple 2.4A, QC3.0, Huawei FCP/SCP
 White



M051-EU

USB-C PD Charger 20W EU Type
 Input: AC 100V-240V
 Output: DC 5V3A, 9V2.22, 12V1.65A
 Port: USB-C
 Power: PD3.0 20W
 Charging protocol: PD3.0, Apple 2.4A, QC3.0, Huawei FCP/SCP
 White



M051-UK

USB-C PD Charger 20W UK Type
 Input: AC 100V-240V
 Output: DC 5V3A, 9V2.22, 12V1.65A
 Port: USB-C
 Power: PD3.0 20W
 Charging protocol: PD3.0, Apple 2.4A, QC3.0, Huawei FCP/SCP
 White



Laptop charger

DC8045C

45W Type C PD Power Adapter
 Input: AC 110-240V 50/60HZ, 0.7A Max
 Output: DC 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A (45W Max)
 Interface: Type C
 Cable Length: 1.8m
 Plug: EU, US, UK Optional
 Black/White



DC8065C

65W Type C PD Power Adapter
 Input: AC 110-240V 50/60HZ, 0.7A Max
 Output: DC 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A (65W Max)
 Interface: Type C
 Cable Length: 1.8m
 Plug: EU, US, UK Optiona
 Black/White



DC8065LC

65W Type C PD Power Adapter
 Input: AC 110-240V 50/60HZ, 0.7A Max
 Output: DC 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A (65W Max)
 Interface: Type C
 Cable Length: 1.8m+0.9m
 Plug: EU, US, UK Optional
 Black/White



HDMI Splitter



DD412A

HDMI Splitter/1*2/1.4V(3D)
 1080P@60Hz,Metal case,Black



DD414A

HDMI Splitter/1*4/1.4V(3D)
 1080P@60Hz,Metal case,Black



DD418A

HDMI Splitter/1*8/1.4V(3D)
 1080P@60Hz,Metal case,Black



DD422

HDMI 2.0 Splitter 1x2
 2.0V,Support 4K@60Hz/YUV 4-4-4,HDCP2.2,
 Metal case,black



DD424

HDMI 2.0 Splitter 1x4
 2.0V,Support 4K@60Hz/YUV 4-4-4,HDCP2.2,
 Metal case,black



DD428

HDMI 2.0 Splitter 1x8
 2.0V,Support 4K@60Hz/YUV 4-4-4,HDCP2.2,
 Metal case,black



DD4112

HDMI Splitter 1*12/1.4V(3D)

Metal case
HDMI Input: 1 port
HDMI Output: 12 port
HDMI resolution: 3D/1080P/1080i/720p/576p/576i/480P/480i
Power adapter Input: AC (50HZ, 60HZ) :100V-240V;
Output: DC12V/3A
Black



DD4116

HDMI Splitter 1*16/1.4V(3D) /Rack type/1U, 19"

Metal case
HDMI Splitter
HDMI Input: 1 port
HDMI Output: 16 port
HDMI resolution: 3D/1080P/1080i/720p/576p/576i/480P/480i
Power adapter Input: AC (50HZ, 60HZ) :100V-240V;
Output: DC12V/3A
Black



DD442

HDMI 1.4 Splitter 1x2

HDMI Input: 1 port
HDMI Output: 2 port
Support HDMI 3D
HDMI resolution: 4K@30Hz/1080P@60Hz
Black



DD422

HDMI 1.4 Splitter 1x4

HDMI Input: 1 port
HDMI Output: 4 port
Support HDMI 3D
HDMI resolution: 4K@30Hz/1080P@60Hz
Black



DD448

HDMI 1.4 Splitter 1x8

HDMI Input: 1 port
HDMI Output: 8 port
Support HDMI 3D
HDMI resolution: 4K@30Hz/1080P@60Hz
Black



DD4416

HDMI 1.4 Splitter 1x16

HDMI Input: 1 port
HDMI Output: 16 port
Support HDMI 3D
HDMI resolution: 4K@30Hz/1080P@60Hz
Black

HDMI Switch



DD432

HDMI Switch 2*1ports 1.4V(3D)

1080P@60Hz, Metal case, Black



DD433

HDMI Switch 3*1ports 1.4V(3D)

1080P@60Hz, Metal case, Black



DD434

HDMI Switch 4*1ports 1.4V(3D)

1080P@60Hz, Metal case, Black



DD435

HDMI Switch 5*1ports 1.4V(3D)

1080P@60Hz, Metal case, Black



DD463

HDMI 2.0 Switcher 3x1

2.0V, Support 4K@60Hz/YUV 4-4-4, HDCP2.2,
Metal case, black



DD465

HDMI 2.0 Switcher 5x1

2.0V, Support 4K@60Hz/YUV 4-4-4, HDCP2.2,
Metal case, black



DD462

HDMI Bi-direction switch, 1 in 2 out, 2 in 1 out

Aluminum Alloy
HDMI version: HDMI 2.0
HDMI resolution: up to 3840x2160P@60Hz
Input cable distance: 55m AWG26 HDMI standard cable
Output cable distance: 55m AWG26 HDMI standard cable
2 HDMI: Host to 1 HDMI Monitor or TV
1 HDMI: Host to 2 HDMI Monitor or TV
Black



DD522

Rj45 Network Bi-Direction Switch

Material: ABS shell
With switching function and distribution function,
it can switch between 2 network interface inputs and 1 network
interface output, or distribution function of 1 network interface input
and 2 network interface outputs.
Applicable to various industries such as securities market and education
Black

DD452B

2x8 HDMI Splitter & Switch

Support 1080p 3D, Metal case
Version: HDMI 1.4
HDMI Input: 2 port
HDMI Output: 8 port
HDMI resolution: 3D(1080P/1080i/720P/576p/576i/480P/480i)
Black



DD732BI

DP Bi-direction switch, 1 in 2 out, 2 in 1 out

Aluminum Alloy
DP version: DP 1.2
DP resolution: up to 3840x2160@60Hz
Input cable distance: 55m AWG26 DP standard cable
Output cable distance: 55m AWG26 DP standard cable
2 DP: Host to 1 DP Monitor or TV
1 DP: Host to 2 DP Monitor or TV(Only one output show at the same time)
Black



DD452A

2x4 HDMI Splitter & Switch

Support 1080p 3D, Metal case
HDMI Input: 2 port
HDMI Output: 4 port
Black

KVM Switch



DD221-4K

2 Port HDMI KVM Switch/1.4V, 4K@30Hz, Plastic case

Version: HDMI 1.4
Switching Mode: External Button
Input: HDMI+USB
HDMI Output: USB-AP*2 HDMI+Button
Resolution: 4K@30Hz, 1.2m



DD211-2K

2 Port VGA KVM Switch/1080P@60Hz, Plastic case

Version: VGA
Switching Mode: External Button
Input: VGA+USB
HDMI Output: USB-AP*2 VGA+Button
Resolution: 1080P@60Hz, 1.2m



DD222

HDMI KVM Switch/2*1 1.4V, 1080P@60Hz, Metal case, Black



DD251-4K

2 Port DP KVM Switch/1.4V, 4K@60Hz, Plastic case

Version: DP 1.2
Switching Mode: External Button
Input: DP+USB
HDMI Output: USB-AP*2 DP+Button
Resolution: 4K@60Hz, 1.2m



DD241-4K

2 Port DVI KVM Switch/4K@30Hz, Plastic case

Version: DVI
Switching Mode: External Button
Input: DVI(18+1)+USB
HDMI Output: USB-AP*2 DVI(24+5)+Button
Resolution: 4K@30Hz, 1.2m



DD224

HDMI KVM Switch/4*1 1.4V, 1080P@60Hz, Metal case, Black



DD228
HDMI KVM Switch/8*1
1.4V,1080P@60Hz,Metal case
Black



DD2216
HDMI KVM Switch/16*1
1.4V,1080P@60Hz,Metal case
Black



DD494
HDMI to AV converte
1.3V,1080P@60Hz
Input:HDMI
Output:RCA
Output video format PAL,NTSC
Powered by Mini USB
White



DD497
AV to HDMI converter
HDMI 1080P/720P@60Hz
Input: RCA
Output: HDMI
Powered by Mini USB
Black

VGA Splitter



DD132
VGA Splitter/1*2
350MHz,Metal case,Black



DD134
VGA Splitter/1*4
350MHz,Metal case,Black



DD138
VGA Splitter/1*8
350MHz,Metal case,Black



DD162
1x2 VGA+AUDIO Splitter
350MHz,Metal case
VGA Input:1 port
VGA Output:2 port
Max resolution:1920*1440 @ 85Hz
Black



DD164
1x4 VGA+AUDIO Splitter
350MHz,Metal case
VGA Input:1 port
VGA Output:4 port
Max resolution:1920*1440 @ 85Hz
Black

Extender



DD471
HDMI R,J45 Extender
Support 4K@30Hz,length up to 60m,
Metal case,Black



DD473
HDMI Fiber Optic Extender
(Uncompressed)
Support Max Resolution 4K@30Hz
Transmission distance: standard 2km
(Uncompressed);
maximum 20km, Black,Metal case



DD472-100
HDMI Extender over Cat5e/
Cat6 with USB KVM and IR
1080P@60Hz,length up to 100m,Metal case
Black



DD474
HDMI Fiber Optic Extender
Support Max Resolution 1080P@60Hz
Transmission distance: standard 20km
(compression);maximum 80km,
Black,Metal case



DD191
VGARJ45 Cat5e/6
Extender
length up to 100m,Metal case,
Black



DD192
VGA Fiber Optic Extender
Support Max Resolution 1080P@60Hz
Transmission distance: standard 20km
(compression);maximum 80km,
Black,Metal case

USB Switch

DH224

USB 2.0 Sharing Switch 2X4

Plastic shell
Side 1: 2X USB Type A Female for PC
Side 2: 4X USB Type A Female for USB peripheral devices
USB: Up to 480Mbps
Function: 2 computers share 4 usb devices at the same time
Power supply: Micro USB 5V
Black



DH324

USB 3.0 Sharing Switch 2X4

Plastic shell
Side 1: 2X USB Type A Female for PC
Side 2: 4X USB Type A Female for USB peripheral devices
USB: Up to 5Gbps, USB ports for data transmission
Function: 2 computers share 4 usb devices at the same time
Power supply: Micro USB 5V
Black



DH244

USB 2.0 Sharing Switch 4X4

Plastic shell
Side 1: 4X USB Type A Female for USB peripheral devices
USB: Up to 480 Mbps, USB ports for data transmission
Function: 4 computers share 4 usb devices at the same time
Power supply: Micro USB 5V
Black



Dh344

USB 3.0 Sharing Switch 4X4

Plastic shell
Side 1: 4X USB Type A Female for PC
Side 2: 4X USB Type A Female for USB peripheral devices
USB: Up to 5Gbps, USB ports for data transmission
Function: 4 computers share 4 usb devices at the same time
Black



M601

Smart speech pen

Plastic shell
aluminum alloy material
Rechargeable battery 200mAh, type-c charging port
Use distance 30 meters, working time 50H
Compatible system: Windows, Mac OS, Android
Compatible documents: PowerPoint, Keynote, PDF, WPS, Prezi, Google Slide
Five functions: mouse function, searchlight function, magnifying glass function,
Laser pointer function, annotation function
Functions: timing vibration reminder
low battery reminder
Charging cable with U disk
Voice operation tutorial
The device supports OTA free upgrade





CORE VALUE OF VCOM BRAND

Brand target: to be the global NO.1 brand on computer peripherals
 Brand character: over-value
 Slogan: Beyond your imagination
 Brand positioning: one-stop supplier for global computer peripherals
 Service positioning: an entire consultative and exhaustive service

DISTRIBUTE VCOM BRAND PRODUCTS

VCOM is a rapid developing and we have distributors/agents in 98 countries up till now. We would like to work with you to develop your local market, move forward together to a brilliant prospect. Contact us now!
 vcom@vcom.hk

