

**VCOM** |   
One-stop Computer Peripherals Supplier

**LOOKING FOR  
GLOBAL DISTRIBUTORS**

**Multi Display  
Extend Solution Provider**



**Business Presentation**



**Home Entertainment**



# MULTIDISPLAYS ADAPTER PRODUCTS

## USB-C to Dual Screen



### CU4511

5 in 1

- 1 x HDMI (4K@30Hz)
- 1 x VGA (1080P@60Hz)
- 1 x 3.5mm
- 1 x USB A 3.0 (5Gb)
- 1 x PD 3.0 100W

HDMI :4K@30Hz for separate output, 1080P@60Hz for simultaneous output with VGA  
 VGA : 1080P@60Hz  
 USB: Up to 5Gbps, Support OTG function  
 PD 3.0 (20V5A,100W for Charge)  
 Length : 0.15m



### CU4512

4 in 1

- 1 x HDMI (4K@60Hz)
- 1 x VGA (1080P@60Hz)
- 1 x USB-A 2.0
- 1 x PD 3.0 100W

HDMI : Max 4K UHD 3840\*2160@60Hz  
 VGA : 1080P@60Hz  
 USB : Up to 480Mbps  
 PD 3.0 (20V5A,100W for Charge)  
 Support MST(windows) function  
 Length : 0.15m



### CU450S

4 in 1

- 1 x HDMI (4K@60Hz)
- 1 x HDMI (4K@30Hz)
- 1 x USB-A 2.0
- 1 x PD 3.0 100W

HDMI : 3840\*2160@60Hz for separate output, 3840\*2160@30Hz for simultaneous output with HDMI  
 USB: Up to 480Mbps, USB ports for data syncing, Support OTG function  
 USB-C(charge): PD3.0 100W  
 Length : 0.15m

## USB-C to Multi Screen



### CUE12-GRY

4-in-1 HUB

HDMI4K60+HDMI1080P60HZ\*2+PD  
 HDMI:3840\*2160/60HZ;  
 HDMI2:1080P/60HZ;  
 HDMI3:1080P/60HZ  
 System Compatibility : Window, MacOS, Android  
 Fast Charging : PD3.0, Max 100W Power Adapter

### DD543

Wireless Screen Extender

Wireless Screen Extender with plastic case  
 1 Type C+PD100W wireless TX module  
 1 HDMI +5V Type C RX module  
 Maximum transmission distance: 15M  
 Maximum resolution 3840\*2160@4K30Hz  
 Transmitter Switch : Supports one-click on/off screen projection mode  
 System Compatibility : Windows , macOS, Android



### CUE76-GRY

10-in-1 HUB

USB A/M TO  
 HDMI\*2+DP\*2 : 3840\*2160/60Hz  
 (Use only one from the group of HDMI or DP ports)  
 System Compatibility : Window, MacOS, Android  
 Data Transfer Speed : Up to 5 Gbps (USB 3.0),  
 Up to 480 Mbps (USB 2.0)

### CU4706

13-in-1 HUB


2 x HDMI (4K@60Hz) 1 x DP(4K@60Hz)  
 3 x USB A 3.0 (5Gb) 1 x USB-C 2.0(480Mbps)  
 1 x USB2.0 (480Mbps) 1 x Gigabit LAN  
 1 x SD 3.0 1 x TF 3.0  
 1 x PD 3.0 100W, 15Watt reserved  
 1 x DC 3.5mm 1 x L-Shape Type C Connector  
 HDMI : 4K@60Hz for separate output, 4K@30Hz for simultaneous output with HDMI  
 DP: 4K@60Hz  
 RJ45: Up to 1000Mbps network  
 SD/TF: USB2.0  
 Audio Jack: TRS 3.5mm



# NEW ARRIVALS



## CAT8

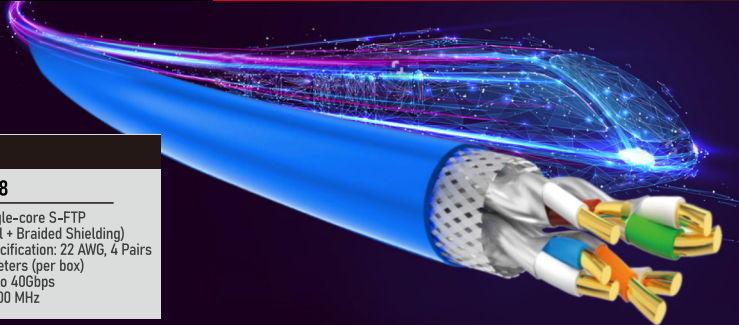

### NC834

#### S/FTP CAT8

Structure: Single-core S-FTP (Aluminum Foil + Braided Shielding)  
 Conductor Specification: Z2 AWG, 4 Pairs  
 Length: 305 meters (per box)  
 Data Rate: Up to 40Gbps  
 Bandwidth: 2000 MHz

## CAT6



### NP613B

#### Slim UTP CAT6 PATCH CORD

Conductor Specification: 7\*0.12mm Bare Copper (BC)  
 Outer Diameter: OD 3.8mm  
 Connector: RJ45 Male with latch protector  
 Bandwidth: 250 MHz  
 Transmission Rate: Supports up to 10Gbps  
 Backward compatible with CAT5E



### NP623

#### Slim FTP CAT6 PATCH CORD

Conductor Specification: 7\*0.12mm Bare Copper (BC)  
 Outer Diameter: OD 4.5mm  
 Shielding: Single-layer Aluminum Foil  
 Connector: RJ45 Male with latch protector  
 Bandwidth: 250 MHz  
 Transmission Rate: Supports up to 10Gbps  
 Backward compatible with CAT5E

## Starlink Interconnect Cable



### NP641

#### Starlink Gen2 High-Speed Interconnect Cable

Cable Category CAT5E  
 Cable Shielding FTP  
 Connector Type Starlink SPX  
 Connector Material Nickel-plated  
 Compatible Devices Starlink Gen2  
 Transmission Speed 1000Mbps  
 Jacket Material PVC  
 Wire Gauge 26 AWG  
 Outer Diameter (OD) 6.0mm  
 Length: 2m/10m/15m/23m/30m/46m/50m



### NP642

#### Starlink Gen3 High-Speed Interconnect Cable

Cable Category CAT5E  
 Cable Shielding FTP  
 Connector Type RJ45  
 Compatible Devices Starlink Gen3  
 Transmission Speed 1200Mbps  
 Jacket Material PVC  
 Wire Gauge 26 AWG  
 Outer Diameter (OD) 6.0mm  
 Length: 2m/10m/15m/23m/30m/46m/50m

## New 16K DisplayPort Cable



### CG655

#### 16K DP Cable

DisplayPort 2.1 DP80 Cable, UHBR20, FSDP (Full Size DP) Cable.  
 Bandwidth: 80Gbps, Supports 16K@60Hz, 8K@60Hz, 4K@240/120Hz, 2K@240Hz, Supports HBR3, HDCP2.2/CEC/EDID/MST, Gold-plated connectors, Metal Shell, Black Cotton Net Braid  
 Backward compatible with : DP1.2/1.4  
 Length : 1m/1.5m/2m



### CU490

#### USB Type C to DP/M 16K@30Hz Cable

Bandwidth Up to 40Gbps  
 Resolution: Max 16K@30Hz, 8K@60Hz, 4K@240/144/120/60/30Hz/2K@240/144/120/60Hz, 1080P@360/240/120/60Hz  
 Aluminum Shell  
 Gold plated, black nylon braid  
 Length : 0.5m/1m/1.5m/2m

## New USB Cable



### CU491

#### USB 4.0 Type-C to C Cable

Transfer Rate : 40Gbps  
 Resolution: Max 8K@60Hz, 4k@240/144/120/60/30Hz, 2K@240/144/120/60Hz 1080P@360/240/120/60Hz  
 Inner Mold Material : PE, white transparent LDPE  
 Outer Mold Material : Black PVC 45P, eco-friendly material  
 Supported Protocols : GEN3 40G, 48V5A, 240W, Thunderbolt protocol supported  
 Outer Diameter (OD) : 5.4mm  
 Length : 2m/3m

## Ultra-thin HDMI Cable



### CG589M

#### HDMI 2.0 4K@60Hz

Resolution Support: 4K@60Hz  
 Bandwidth: 18Gbps  
 Supported Features: High-Speed Ethernet, 3D, ARC, HDR  
 Wire Gauge: Ultra slim (specific diameter available upon request)  
 Outer Diameter: OD 3.6/3.9mm  
 Length: 1m/2m/3m



### CG851

#### HDMI 2.1 8K

Resolution Support: 8K@60Hz, 4K@120Hz  
 Bandwidth: Up to 48Gbps  
 Supported Features: Ethernet, 3D, HDCP 2.2, HDR, Dynamic HDR, eARC  
 Outer Diameter: OD 3.2mm  
 Conductor Specification: 36AWG  
 Length: 0.5m/1m/1.5m/2m

## Magnetic Retractable Cable



### CU419-USB3.0

#### Magnetic Retractable cable USB3.2 Gen 2

Data Transfer Speed (106 bps)  
 Cable Type USB-C to USB-C cable  
 Connector Material Nickel-plated  
 Shielding Double shielded  
 Compatibility USB 1.1, USB 2.0, USB 3.2, USB Power Delivery (USB PD)  
 Charging Standards PD100W  
 Length : 1m/1.5m/1.8m



### CU419-USB2.0


#### Magnetic Retractable cable USB2.0

Data Transfer Speed (480M bps)  
 Cable Type USB-C to USB-C cable  
 Connector Material Nickel-plated  
 Shielding Double shielded  
 Compatibility USB 1.1, USB 2.0, USB Power Delivery (USB PD)  
 Charging Standards PD100W  
 Length : 1m/1.5m/1.8m

# 4K/8K HDMI & DP Cable




## 4K USB to DP Cable



**CU422MCV**  
USB Type C to DP/M Cable


Resolution : Max 4K UHD 4K@60Hz  
Gold plated, Silver Metal Shell, Black cotton net braid  
Length : 1.8m/3m



**CU422MV**  
USB Type C to DP/F Cable


Resolution: Max 4K UHD 3840\*2160@60Hz  
Aluminum Shell  
Length : 0.15m

## 4K USB to HDMI Cable



**CU423MCV**  
USB Type C to HDMI AM Cable

Resolution : Max 4K UHD 4K@60Hz  
Gold plated, Silver Metal Shell, Black cotton net braid  
Length : 1.8m/3m



**CU423MV**  
USB Type C to HDMI A/F Cable

Resolution : Max 4K UHD 3840\*2160@60Hz  
Aluminum Shell  
Length : 0.15m

## 4K DP to HDMI Cable



**CG608M**  
DisplayPort M 1.2V/HDMI AM Cable

Resolution:Max 4K UHD 4K@60Hz  
24K Gold plated Connector, Silver Metal Shell, Black Cotton Net Braid  
Length : 1.5m/1.8m/2m/3m

## 8K HDMI Cable



**CG865**  
HDMI AM/AF 2.1V Cable


Bandwidth up to 48Gbps, Ethernet , 3D,eARC,HDCP 2.2,HDR, Support 8K@60Hz/4K@120Hz/2K@144Hz  
24K Gold plated Connector, silver Metal Shell,Black Cotton Net Braid  
Length : 1.5m/1.8m/3m/5m/10m



**CG516M**  
HDMI AM/AF 2.1V Extension Cable


Bandwidth up to 48Gbps Ethernet,3D,HDCP 2.2,HDR, Support 8K@60Hz/4K@120Hz/2K@144Hz  
Gold plated,Silver Metal Shell, Black cotton net braid  
Length : 0.3m/1m

## 8K USB Cable




**CU560**  
USB4 C/M to C/M with IC Cable

8K@30Hz/ 5K@60Hz/ Dual 4K@60Hz  
Data Transfer: 40Gbps  
Current Rating: 5A  
Power: PD 240W  
Compatible with Thunderbolt 4/3, USB3.2 & 3.1 Transfer protocol  
Silver Metal Shell,Black cotton net braid  
Length : 1m/1.2m



**CU422MV**  
USB Type C to DP Cable

Resolution:Max 8K UHD 8K@60Hz /4k@120Hz/2K@144Hz  
Aluminum Shell  
Length : 0.15m



**CU423MV**  
USB Type C to HDMI A/F Cable


Input: USB type C Male  
Output: HDMI type A Female  
Resolution:Max 8K UHD 8K@60Hz /4K@120Hz/2K@144Hz  
Aluminum Shell  
Length : 0.15m

## 8K DP Cable



**CG635**  
DisplayPort M/M 1.4V Cable

Bandwidth:32GBps  
8K@60Hz/ 4K@144Hz/2K@240Hz  
Support HBR3,HDCP2.2/CEC/EDID  
24K Gold plated Connector, Silver Metal Shell,Black Cotton Net Braid  
Length : 1.5m/1.8m/3m/5m/10m




**CG635F**  
DisplayPort M/F 1.4V Extension Cable

Bandwidth up to 32GBps  
8K@60Hz/4K@120Hz  
Support HBR3,HDCP2.2/CEC/EDID  
Gold plated,Silver Metal Shell, Black cotton net braid  
Length : 0.3m/1m



**CG665**  
MiniDP M to MiniDP M, 1.4V Cable

Bandwidth:32GBps  
8K@60Hz/ 4K@144Hz  
Support HBR3,HDCP2.2/CEC/EDID  
24K Gold plated Connector, silver Metal Shell,Black Cotton Net Braid  
Length : 1.5m/1.8m/3m



**CG685**  
MiniDP M to DP M,1.4V Cable

Bandwidth:32GBps  
8K@60Hz/ 4K@144Hz  
Support HBR3,HDCP2.2/CEC/EDID  
24K Gold plated Connector, silver Metal Shell,Black Cotton Net Braid  
Length : 1.5m/1.8m/3m



**CG685F**  
MiniDP M to DP/F Extension 1.4V Cable

Bandwidth:32GBps  
8K@60Hz/4K@120Hz  
Support HBR3,HDCP2.2/CEC/EDID,24K Gold plated, Silver Metal Shell, Black cotton net braid  
Length : 0.3m/0.5m

# USB C Series



# USB4 Cable Right Angle



## CU543MR-0.8m

### USB C 40Gbps

USB C/M to C/M Cable with IC 40Gbps USB4 Right Angle 0.8m  
Coaxial line, Aluminum shell  
Data transfer: 40Gbps USB4  
Current Rating: 5A  
Power: Built in E-Marker Chip support 240W  
USB Power Delivery :Support  
Video: Single 8K@30Hz 5K@60Hz or Dual 4K@60Hz  
Function: Charge, Data Transfer, Video, Audio  
Compatible with Thunderbolt 4/3,USB3.2 & 3.1 Transfer protocol

# USB4 Adapter



## CA448D

### USB4 Adapter

Material: aluminum shell  
Function:  
40Gbps Data Transfer  
Max 240W Fast Charging  
8K Video Output



## CA444D


### USB4 Adapter

Material: aluminum shell  
Function:  
40Gbps Data Transfer  
Max 100W Fast Charging  
8K Video Output

Feature: The USB C adapter allows the cable to have a suitable extension direction, which can avoid the wear of the cable and the input port of the device, prolonging the service life, and support charging and data transmission.

# USB C Hub

# USB C Cable



**CUE11S** 5 in 1

4 x USB-C 3.1 (10Gbps)  
1 x PD 3.0 100W


USB 3.1\*4: Up to 10Gbps, only for data syncing, not support video output or charging  
PD 3.0 (20V5A,100W for Charge)



**CUE15** 3 in 1

1 x HDMI (4K@60Hz)  
1 x USB A 3.0 (5Gb)  
1 x PD 3.0 100W


HDMI: Max 4K@60Hz (Required source DP1.4)  
PD 3.0 (20V5A,100W for Charge)



**CUE18** 7 in 1

1 x HDMI (4K@30Hz)  
1 x USB A 3.0 (5Gb)  
2 x USB-A 2.0 (480Mbps)  
1 x SD 2.0  
1 x TF 2.0  
1 x PD 3.0 100W


SD & TF2.0 : Only 1 cards reading simultaneously  
PD 3.0 (20V5A,100W for Charge)



**CUE39** 7 in 1

1 x HDMI (4K@60Hz)  
1 x HDMI (1080P@60Hz)  
2 x USB A 3.0 (5Gb)  
1 x SD 2.0  
1 x TF 2.0  
1 x PD 3.0 100W


HDMI-1: 4K@60Hz  
HDMI-2: 1080P@60Hz (Required Software Driver)  
PD 3.0 (20V5A,100W for Charge)  
Windows MST (Extended or Mirror)  
MacOS OXP (Extended or Mirror)



**CU520M**

**USB C 20Gbps**


Material : Aluminum shell+ Braid+Nickel plated plug  
Length : 2m  
Data transfer : 20Gbps USB4  
Current Rating: 5A  
Power : Built in E-Marker Chip support 100W  
USB Power Delivery : Support  
Video: Single 8K@30Hz  
5K@60Hz or Dual 4K@60Hz  
Function: Charge, Data Transfer, Video, Audio: Compatible with Thunderbolt 4/3, USB3.2 & 3.1 Transfer protocol



**CU540M**

**USB C 40Gbps**


Material : Aluminum shell+ Braid+Nickel plated plug  
Length : 1.2m  
Data transfer : 40Gbps USB4  
Current Rating: 5A  
Power : Built in E-Marker Chip support 100W  
USB Power Delivery : Support  
Video: Single 8K@30Hz  
5K@60Hz or Dual 4K@60Hz  
Function: Charge, Data Transfer, Video, Audio: Compatible with Thunderbolt 4/3, USB3.2 & 3.1 Transfer protocol



**CU541M**

**USB C 40Gbps**

Material : Aluminum shell+Gold plated plug  
Length : 1.2m  
Data transfer : 40Gbps USB4  
Current Rating: 5A  
Power : Built in E-Marker Chip support 240W  
USB Power Delivery : Support  
Video: support 5K@60Hz resolution  
Function: Charge, Data Transfer, Video, Audio: Compatible with Thunderbolt 3, USB3.2 & 3.1 Transfer protocol



**CU544**

**USB C 40Gbps**

USB C/M to C/M Cable with IC 40Gbps USB4 FPC Flat Cable  
Soft and easy to bend  
Data transfer: 40Gbps USB4  
Current Rating: 5A  
Power: Built in E-Marker Chip support 240W  
USB Power Delivery :Support  
Video: Single 8K@30Hz  
5K@60Hz or Dual 4K@60Hz  
Function: Charge, Data Transfer, Video, Audio: Compatible with Thunderbolt 4/3, USB3.2 & 3.1 Transfer protocol

# SSD Enclosure Series

Support System : Windows, Mac OS, Linux ,Android



## VCOM INTERNATIONAL LTD.

### Head Quarter

>1/2F, Building D, Youke Business Center, Kexin Rd, Tangxia, Tianhe District, Guangzhou City, Guangdong Province, China

### Cable & Electronic Factory

>Xiaopenggang Industrial Zone, Longxi Town, Boluo District, Huizhou City, Guangdong Province, China  
Tel:+86-752-6873123 Fax:+86-752-6873155



[www.vcom.com.hk](http://www.vcom.com.hk)



**CU850N**  
**SSD Enclosure for M.2 PCI-E NVME Protocol 10G**  
Material : Aluminum+ABS  
Size: 102\*28\*12mm  
Interface : USB 3.1 Gen 2 Type-C  
Compatibility : M.2 NVMe M Key & (M+B) Key Z280/Z260/Z242/Z230 SSD  
Transmission Speed: 10Gbps  
Max Capacity : 4TB




**CU850SN**  
**SSD Enclosure for M.2 NVMe and SATA Dual Protocol 10G&6G**  
Material : Aluminum+ABS  
Size: 102\*28\*12mm  
Interface : USB 3.1 Gen 2 Type-C  
Compatibility : M.2 NVMe M Key & (M+B) Key and M.2 SATA (M+B) Key Z280/Z260/Z242/Z230 SSD  
Transmission Speed: 10Gbps & 6Gbps  
Max Capacity : 4TB




**CU855N**  
**SSD Enclosure for M.2 NVMe**  
Material: Aluminum  
Interface: USB 3.1 Gen 2 Type-C  
Compatibility: M.2 NVMe M Key & (M+B) Key  
Transmission Speed: 10Gbps  
Max Capacity: 4TB



**CU855SN**  
**SSD Enclosure for M.2 NVMe and SATA Dual Protocol 10G&6G**  
Material: Aluminum  
Interface: USB 3.1 Gen 2 Type-C  
Compatibility: M.2 NVMe M Key & (M+B) Key and M.2 SATA (M+B) Key Z280/Z260/Z242/Z230 SSD  
Transmission Speed: 10Gbps & 6Gbps  
Max Capacity: 4TB



**CU874N**  
**USB4 SSD Enclosure for M.2 PCI-E NVME Protocol 40G**  
Material : Aluminum  
Interface : USB4 Type-C  
Compatibility : M.2 NVMe M Key & (M+B) Key Z280 SSD  
Transmission Speed : 40Gbps  
Max Capacity : 4TB




**CU901SN**  
**Type c F to M.2 SSD Enclosure**  
10Gbps+USBA3.2\*2+1\*USBC-3.2 10G  
Include package and cable NVMe & SATA M.2 SSD Enclosure, USB 3.1 Gen 2 M Key & B&M Key Hard Drive Adapter, Supports UASP for SSD Size Z280/Z260/Z242/Z230



**CU853N**  
**SSD Magnetic Enclosure for M.2 NVMe Protocol 10G**  
Interface: Type-C  
Compatibility : M Key & (M+B) Key Z230 SSD  
Transmission Speed: 10Gbps  
Max Capacity : 2TB  
Support System: Windows, Mac OS, Linux ,Android  
Support UASP & Trim: support



**CU853SN**  
**SSD Magnetic Enclosure for M.2 NVMe and SATA Dual Protocol 10G**  
Interface: Type-C  
Compatibility : M Key & (M+B) Key Z230 SSD  
Transmission Speed: 10Gbps  
Max Capacity : 2TB  
Support System: Windows, Mac OS, Linux ,Android  
Support UASP & Trim: support



**CU854N**  
**TYPE C M TO PD +NVMe SSD Enclosure**  
TYPE C M TO PD+NVMe SSD Enclosure with Plastic case, support M.2 NVMe Z230 PD : 100WSSD transport 10Gbps, Include 1piece iPhone 15 promax cable and a screw driver

